

LED MODULE SPECIFICATION

Model: OD-P4-10S-320x160-1921

Version 1.0.1

Designed by:	
Reviewed by:	
Authorized by:	

Content

1	Precautions -----	1
2	Product description -----	2
3	Product technical parameter -----	2
3.1	Lamp technical parameter -----	2
3.2	Module technical parameter -----	3
4	Screw position diagram -----	3
5	Installation guide -----	4
5.1	Data interface description -----	4
5.2	Module power/data connection diagram -----	4
5.3	Power interface description -----	5
6	Cabinet recommendation -----	5
6.1	Cabinet image -----	5
6.2	Cabinet parameter -----	5
7	Accessories and package-----	6

Precautions

Warnings

- Do not apply rough force such as bending or twisting to the modules during assembling.
- Do not mix-use this product with other model LED module.
- Do not mix-use modules of different batch numbers in one screen, which may cause color gamut and brightness difference.
- Do not reverse the positive and negative poles of module power connector, otherwise the module will be breakdown.
- Do not plug or unplug modules when the power is on.
- Do not modify the modules or change the circuit connection without consulting with LEDIFY.

Cautions

- Please make sure the power supply is always off when detaching the connectors, replacing components or organizing data/power cables.
- LED lamps are very fragile against external impact. Please pay special attention to the modules surface when handling the modules.
- The modules shall be operating under the following conditions (operating temperature: -20 °C to 50 °C / -4 °F to 122 °F; Operating humidity: 10 – 65% RH). Inappropriate operating condition may deteriorate the performance and reduce the life span of LED modules.
- Please storage the modules under LEDIFY recommended condition (LEDIFY recommended storage condition: Temperature: 25°C ±10°C; RH = 30% ± 10%).
- ESD (Electro Static Discharge) will cause the chips or electronic components damage. Please be sure to ground yourself, wear an earth band and avoid cloths made by chemical fiber when touching the modules by hands in order to protect the products from static electricity.
- The operating voltage input of the modules is 4.5-5 V. over voltage or reversed voltage are strictly prohibited.
- When using power supply not approved by LEDIFY. Please rigorously assess the datasheet of the power supply so as not to cause damage to the circuit. LEDIFY will not take responsibility for any damage caused by the above situation.
- The color of the LED modules may change after a long time exposed to UV rays. It's a normal physic phenomenon.
- Please use metal-free soft brush for cleaning the module front surface.
- Please pay attention to the metal screws when assembling or disassembling the modules to the cabinet. Metal screws may cause serious short circuit or fire hazzard if dropping them into the cabinet. Please be sure all the screws are not left in the cabinet and operate with all the power supply off.


Model: OD-P4-10S -320x160-1921

Features


- 80x40(R/G/B) dots LED matrix
- Waterproof design, rating IP65
- 1/10 scan with ghost effect elimination function
- Top level PCB flame retardant, rating 94V0
- 1.2mm 2 layer PCB material, good heat dissipation
- SMD1921 high quality lamps, high color contrast and long lifetime

3 Product description

OD-P4-10S-320x160-1921, 4mm pixel pitch LED modules are widely used in outdoor billboard, shopping mall sign, sports screen and other outdoor occasions.

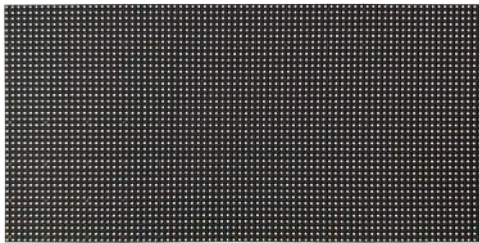

Front view

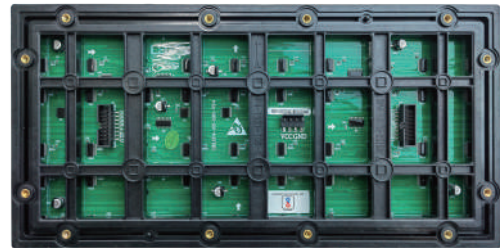

Rear view

3 Product technical parameter


3.1 Lamp technical parameter

Item	Unit	R	G	B
Current	mA	15	8	5
Wavelength	nm	620~625	525~530	465~470
Brightness	mcd	305~415	540~700	85~110
Voltage	V	2.0~2.4	2.8~3.2	2.8~3.2
Color Temp	K	8000~12000		
Brightness	cd/m ²	≥5000		

3.2 Module technical parameter

Technical Parameter	
Dimension	320mmx160mm
Pixel Pitch	4 mm
Resolution	80×40
Weight	480-520 g
LED Lamp	SMD1921
Max Brightness	≥5000cd/sqm
Refresh Rate	1920 or 3840 Hz
Scan	1/10
Gray Scale	14 bit
IP Level	IP65
Lifespan	100000 h
Operating Voltage	4.5-5V
Avg Power	200-300 W
Max Current	7.5-8 A
Power Supply	6 modules per 300W power supply
Viewing Distance	6-24 m
Viewing Angle	Horizontal >140° Vertical>140°
Operating Temp	-20 °C to 50°C / -4 °F to 122 °F
Operating Humidity	10-65% RH
Certifications	CE, FCC, RoHS
Warranty	2 year

4 Position hole diagram

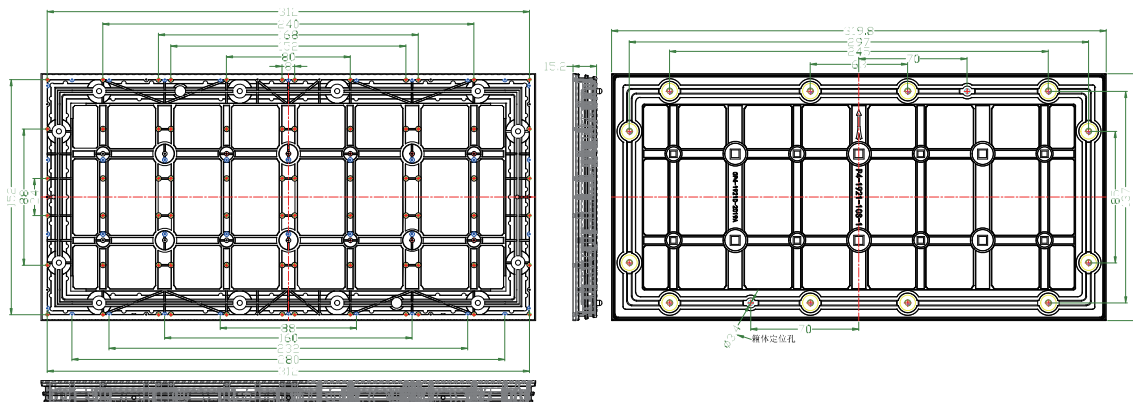

5 Installation guide


5.1 Data interface description

Data Interface description						
Pin	Name	Pin function	Pin	Name	Pin function	
1	R1	Data of red	2	G1	Data of green	
3	B1	Data of blue	4	GND	Ground	
5	R2	Data of red	6	G2	Data of green	
7	B2	Data of blue	8	GND	Ground	
9	A	Line scan signal	10	B	Line scan signal	
11	C	Line scan signal	12	D	Line scan signal	
13	CLK	Clock signal	14	LAT	Data latch	
15	OE	Output enable	16	GND	Ground	


J1

R1	1	1	2	2	G1
B1	3	3	4	4	GND
R2	5	5	6	6	G2
B2	7	7	8	8	GND
A	9	9	10	10	B
C	11	11	12	12	D
CLK	13	13	14	14	LAT
OE	15	15	16	16	GND

5.2 Module power/data connection diagram

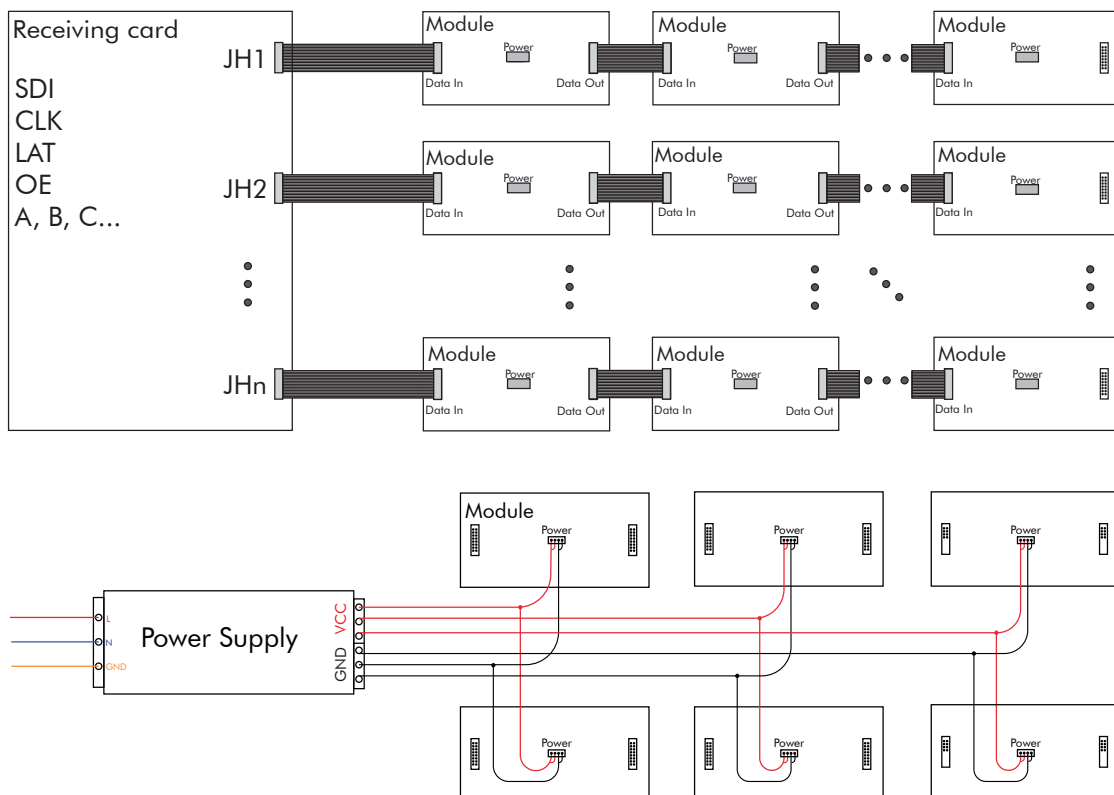


5.3 Power interface description

Power interface description		
Pin	Name	
1	VCC	
2	VCC	
3	GND	
4	GND	

6 Cabinet recommendation


6.1 Cabinet image

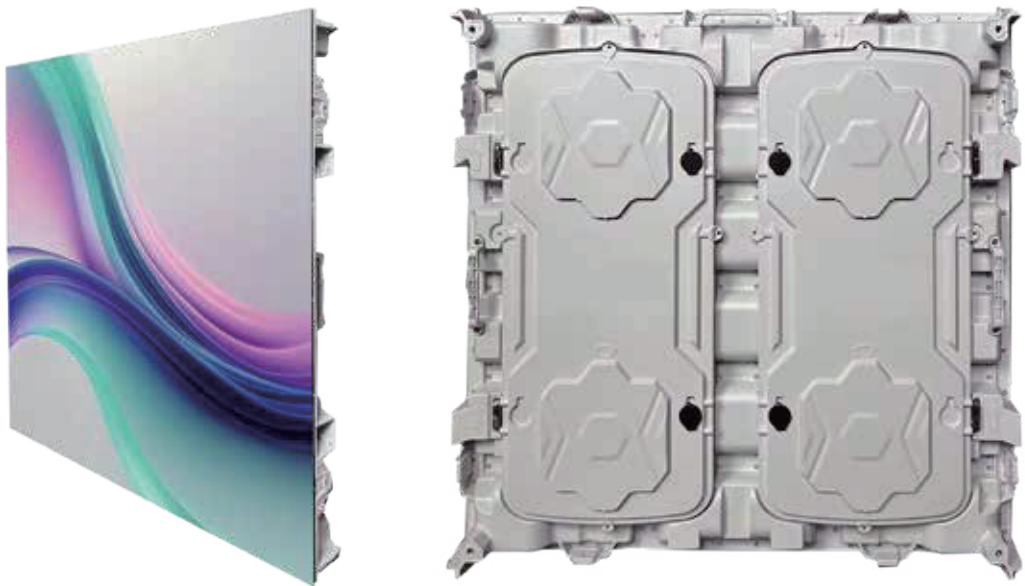


6.2 Cabinet parameter

Cabinet parameter			
Cabinet Size	960mmx960mm	Refresh Rate	1920 or 3840 Hz
Thickness	106 mm	Resolution	240×240
IP Level	IP65	Max Power	750~800 W/sqm
Brightness	≥5000 cd/sqm	Avg Power	250~300W/sqm
Gray Scale	14 bit	Screw / Magnet	M4
Weight/sqm	30±0.5 kg	Interface	HUB75

7 Accessories and package

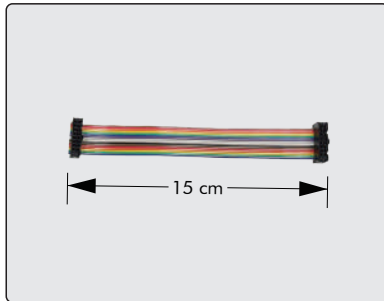

Data cable

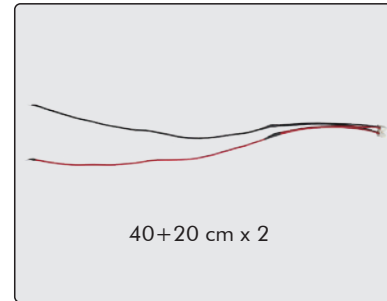

Power cable

Package

The product are packed in specially designed carton box. The carton size (630 x 370 x 395mm/40PCS) are compatible with the module and the advanced structure offers perfect protection. The size of the carton matches the container also, that enhances the space utilization and reduces the cost of delivery in the meantime.

63x37x39.5CM

Fragile,Handle With Care		Fragile,Handle With Care	
			
  		  	
Model <u>DP10.XDP8.XDP6.XDP5.XDP4.X</u> Size <u>320*160mm</u> Qty <u>40PCS</u> Cnt size <u>630*370*395mm</u>		Model <u>DP10.XDP8.XDP6.XDP5.XDP4.X</u> Size <u>320*160mm</u> Qty <u>40PCS</u> Cnt size <u>630*370*395mm</u>	